

**CIHM
Microfiche
Series
(Monographs)**

**ICMH
Collection de
microfiches
(monographies)**



Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques

© 1997

Technical and Bibliographic Notes / Notes techniques et bibliographiques

The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming are checked below.

- Coloured covers / Couverture de couleur
- Covers damaged / Couverture endommagée
- Covers restored and/or laminated / Couverture restaurée et/ou pelliculée
- Cover title missing / Le titre de couverture manque
- Coloured maps / Cartes géographiques en couleur
- Coloured ink (i.e. other than blue or black) / Encre de couleur (i.e. autre que bleue ou noire)
- Coloured plates and/or illustrations / Planches et/ou illustrations en couleur
- Bound with other material / Relié avec d'autres documents
- Only edition available / Seule édition disponible
- Tight binding may cause shadows or distortion along interior margin / La reliure serrée peut causer de l'ombre ou de la distorsion le long de la marge intérieure.
- Blank leaves added during restorations may appear within the text. Whenever possible, these have been omitted from filming / Il se peut que certaines pages blanches ajoutées lors d'une restauration apparaissent dans le texte, mais, lorsque cela était possible, ces pages n'ont pas été filmées.
- Additional comments / Commentaires supplémentaires:

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- Coloured pages / Pages de couleur
- Pages damaged / Pages endommagées
- Pages restored and/or laminated / Pages restaurées et/ou pelliculées
- Pages discoloured, stained or foxed / Pages décolorées, tachetées ou piquées
- Pages detached / Pages détachées
- Showthrough / Transparence
- Quality of print varies / Qualité inégale de l'impression
- Includes supplementary material / Comprend du matériel supplémentaire
- Pages wholly or partially obscured by errata slips, tissues, etc., have been refilmed to ensure the best possible image / Les pages totalement ou partiellement obscurcies par un feuillet d'errata, une pelure, etc., ont été filmées à nouveau de façon à obtenir la meilleure image possible.
- Opposing pages with varying colouration or discolourations are filmed twice to ensure the best possible image / Les pages s'opposant ayant des colorations variables ou des décolorations sont filmées deux fois afin d'obtenir la meilleure image possible.

This item is filmed at the reduction ratio checked below /
Ce document est filmé au taux de réduction indiqué ci-dessous.

	10x		14x		18x		22x		26x		30x
	12x		16x		20x		24x		28x		32x

(Note: The 24x cell in the second row contains a checkmark.)

The copy filmed here has been reproduced thanks to the generosity of:




National Library of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol \rightarrow (meaning "CONTINUED"), or the symbol ∇ (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

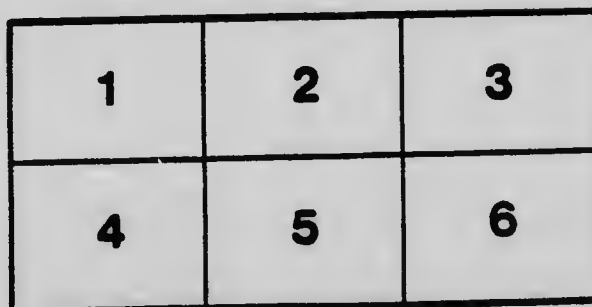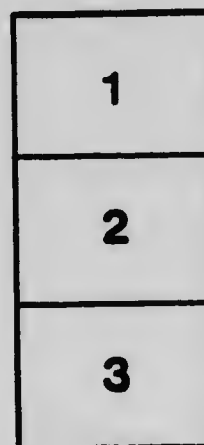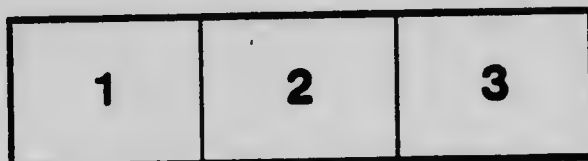

L'exemplaire filmé fut reproduit grâce à la générosité de:

Bibliothèque nationale du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.


Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.

Un des symboles suivants apparaîtra sur la dernière image de chaque microfiche, selon le cas: le symbole \rightarrow signifie "A SUIVRE", le symbole ∇ signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

MICROCOPY RESOLUTION TEST CHART

(ANSI and ISO TEST CHART No. 2)



APPLIED IMAGE Inc

1653 East Main Street
Rochester, New York 14609 USA
(716) 482 - 0300 - Phone
(716) 288 - 5989 - Fax



SUPPLEMENT NO. 1 TO THE THIRTY-EIGHTH ANNUAL REPORT OF THE
DEPARTMENT OF MARINE AND FISHERIES

TIDE LEVELS AND DATUM PLANES

ON THE

PACIFIC COAST OF CANADA

BY

W. BELL DAWSON, M.A., D.Sc. F.R.S.C., M. INST. C.E.,

Engineer in Charge of the Tidal and Current Survey of Canada.

PRINTED BY ORDER OF PARLIAMENT



OTTAWA

PRINTED BY S. E. DAWSON, PRINTER TO THE KING'S MOST
EXCELLENT MAJESTY

1906



TIDE LEVELS AND DATUM PLANES

ON THE

PACIFIC COAST OF CANADA.

By W. BELL DAWSON, M.A., D.Sc., F.R.S.O., M. Inst. C.E., Engineer in Charge
of the Tidal and Current Survey of Canada.

In extending the Survey of Tides and Currents to British Columbia on the Pacific coast, it has been necessary to decide upon planes of reference for the height of the tide in the various harbours, and to establish several new bench marks. In doing so, any datum already established, or levels previously determined, have been correlated with the new work, to avoid confusion and to give the tide levels a satisfactory basis from the outset. The levels which a continuous record of the tide affords, will be valuable for reference in the construction of wharfs, dredging and other harbour improvements, and in city works; as well as for marine purposes.

Owing to the planning and directing of tidal work on the St. Lawrence and the Atlantic coast, and the investigations of currents, during the earlier years of this Survey, it has not been possible for the writer to visit the Pacific coast until the season of 1905. Some headway has been made, however, in the publication of tide tables for Pacific ports, and the commencement of tidal observations. The opportunity of this season, enables the results with regard to datum planes and bench-marks to be in a complete form, up to the stage now reached.

In any tidal observations, the two essentials are the correct time and a plane of reference for height; as these are the co-ordinates of the tidal curve. The main object of this Survey, as a branch of the Marine department, is to deal with the time of the tide; since this is the matter of chief importance to navigation, and the question of levels is quite secondary. In the strong tidal currents of British Columbia, it is information as to the time of slack water that is most wanted by the mariner. To obtain correct time for the observations is also the greatest difficulty met with on such a coast. But the value of reliable levels, which can only be obtained from tidal observations, makes it seem right to take the additional trouble necessary to secure them.

The importance of publishing such results is emphasized by what has occurred in British Columbia. Bench-marks, carefully established, are now useless because the record of their elevations is lost through fire; the loss of level notes or the destruction of a primary bench-mark leaves elaborate surveys with uncertainty in their datum planes, which it is extremely difficult to re-determine satisfactorily. By publication, these records might have been preserved; and a large amount of good work, and subsequent trouble and expense in replacing it, would have been saved.

The condition of the tide levels, as met with at different places, was strongly contrasted. At some places of course, there was nothing to refer to; and it was even difficult to know at what level to set a tide scale so that the tide would keep within its range. The only course was to place an independent bench-mark, and make a beginning. At the other extreme, there was a redundancy of datum planes, estab-

lished by various engineers and surveyors with little regard to anything previously done, and often complicated by loss of record. In such a case, to follow the precedent of ignoring the past and beginning afresh, would have been unprincipled, especially when valuable tide levels were often carefully referred to an undoubted datum. In contrast with this, the service rendered by Mr. H. J. Cambie, the Resident Engineer of the Canadian Pacific Railway at Vancouver, deserves mention. He has taken the trouble to furnish information regarding levels of the Public Works Department, the British Admiralty, and the City of Vancouver, which has kept various planes of reference in relation, and has avoided uncertainty and contradiction.

Character of the Pacific tide.—The most important plane of reference for tide results from tidal observations, is undoubtedly Mean Sea level. To understand the best method of obtaining its value, it is necessary to explain briefly the character of the Pacific tides, as at first sight they appear quite irregular.

In all parts of the world, the tides are found to accord with the varying positions and distances of the moon and the sun. In the North Atlantic, where they were first studied, it happens that they are chiefly influenced by the moon's position. It was thus supposed that the primary characteristic of all tides was a marked regularity in height from springs to neaps in the period of the synodic month.

The tide of the Pacific, however, can best be described as a declination tide. Its leading feature is a pronounced diurnal inequality in time and height, which accords with the declination of the moon; and this is also subject to an annual variation due to the change in the declination of the sun. The period in which the diurnal inequality recurs is the tropical or declination-month, of 27.2 days; which is shorter than the synodic month and gradually falls back through its period in successive months. The solar influence is unusually large in the Pacific relatively to the lunar, the annual variation is the more accentuated.

On the open coast of the Pacific, the tide curve is still fairly regular, though showing the diurnal inequality strongly; and in some regions, especially north of the springs and neaps can be distinguished with little difficulty.

But in the Strait of Fuca and the region of the Strait of Georgia, which occupy up half the coast line of British Columbia and where all the more important harbours are situated, the appearance of the tide curve is anomalous. The high water is nearly at the same level; and the range depends on the amount of fall to low water, which may be almost inappreciable or very pronounced. During the greater part of the day, there may thus be a long stand or only a slight fluctuation near the high water level; with a sharp and short drop to the lower low water which occurs once in the day. This type only changes to a fairly symmetrical curve when the moon is near the equator near the time of the equinoxes.

The spring and neap tides are thus reduced to a secondary feature which is usually obscured by the stronger characteristics of the tide. The 'Establishment' which is so well marked in the Atlantic, is here almost illusory; unless it is strictly reduced to equinoctial and equatorial conditions, in accordance with the definition in France. In dealing with tide levels, it may still be convenient to speak of spring and neap tides, if they are understood to mean the two maxima and the two minima in range or in level which always occur in the period of the lunar month. But the two highest and the two lowest points on the tide curve for the month, may be much as five days before or after the full or new moon, as they are so largely influenced by the diurnal inequality, dependent on declination.

The extreme tides of the year necessarily occur at the nearest point to the solstices at which the moon reaches its maximum declination.

A tide of this character is apt to be termed irregular by the mariner; and though tropical or declination-month, which is its governing period, is less familiar and noticeable than the synodic month of the moon's phases. It is evident, however, that this tide is perfectly astronomical; and when reduced by harmonic analysis its prediction is just as definite as for any other type of tide.

SESSIONAL PAPER No. 21c

Mean Sea level.—With a tide of this type, there is a notable difference between the half-tide level, and the true value of Mean Sea level. Its only accurate value is the mean ordinate found by the integration of the tide curve, referred to any invariable base line or datum. This mean ordinate fixes the position of the horizontal line which bisects the area of the tide curve; and this also accords with the best definition of Mean Sea level for any type of tide. We have occasion later on, to point out the importance of adhering to this definition; as the half-tide level may differ a whole foot from true Mean Sea level, even in the case of a tide whose extreme range is only 18 feet.

The advantage of a registering tide gauge is much emphasized with tides of this character. If scale readings are taken by direct observation, which the Admiralty surveyors usually prefer, they must be continuous, day and night, and afterward plotted as a curve; or little use can be made of them except for the reduction of soundings. With a registering gauge, this elaborate and expensive method can be dispensed with. The hourly ordinates of the tide curve throughout the year enable the true value of Mean Sea level to be readily found; and even with a shorter period, the continuity of the record enables the diurnal inequality to be followed; and if this is known, the average level and the extremes of high and low water, and other data, can be correctly determined. The continuous record is equally important with respect to the time of the tide, in which there is a similar inequality of interval; but with this we are not now dealing.

The question of Mean Sea level is of unusual interest on the Pacific coast, as there is reason to believe that its elevation is changing. Some indications point to a rise in the level of the coast, at as high a rate as one or two feet per century. It is only from tidal observations properly reduced, that any trustworthy result can be arrived at; and if the change is as rapid as supposed, it will not require an interval of many years to obtain a fair approximation to its amount.

DATUM PLANES AT VICTORIA.

At Victoria and Esquimalt, the planes of reference were found to be in great confusion, no less than eight datum planes existing, unrelated to each other as a rule, and the records regarding them often unobtainable through loss of note books, fire, or destruction of bench-marks. Most of these are defined by some reference to the tide, such as high water, mean sea level or low water; but the tide levels assumed do not correspond with each other, and they are thus quite indefinite unless fixed by a bench-mark.

To correlate these for tidal purposes and to re-determine the chart datum, it was necessary to go fully into the history of the whole matter, and also to run special levels for three and a half miles, to connect Esquimalt with Victoria. We have also had the opportunity this season, to go over the ground personally, to examine original plans and notes at Victoria, to inspect the bench-marks, to see the records in the Public Works office in New Westminster, and to discuss matters with those who had to do with them; in the endeavour to bring all the information into correspondence. We will give the results as concisely as possible; but it will make the matter clearer to follow the chronological order. For all practical purposes, anything previous to 1860, if not prehistoric, may be regarded as ancient history.

Bench-marks.—There are several bench-marks in Victoria for which elevations are known with reference to more than one datum; but the resulting difference instead of being constant, is found to vary within the limits of an inch or two. When a relation has had to be determined by averaging such differences, this will be explained. But there are four of the datum planes which can now be referred to an individual bench-mark, and these four are the most important from a tidal point of

view. All the planes of reference at Esquimalt have also been connected with same bench-mark, by the new levels run this season. The relations thus obtained are more trustworthy than if derived from averages, and will, therefore, be given the preference.

The bench-mark referred to is at the north-east corner of Wharf and Fort streets in Victoria, and is thus near the water front. The building at this corner, now occupied by the Hamilton Powder Company's offices, has a sandstone foundation, the brickwork; and the top course of this foundation, which is nearly on the level of the sidewalk, forms the door sills on the Wharf street front of the building. This point used as a bench-mark is the surface of the sandstone, below the brickwork at the street corner, usually termed the plinth; or else the southern end of the first sill, which is two and a half feet from the corner. The level of these two points is identical. For brevity, we may term this the Standard bench-mark.

Hudson's Bay Company's datum.—This is chiefly of importance because used as the basis of a contoured plan of Victoria made by Mr. G. Hargreaves in 1893. In making this plan, bench-marks were established throughout the city; but the notes recording these were handed over to the city, and have been lost for many years. There are a few points on masonry buildings for which elevations with reference to this datum are marked on the plan itself, or are in Mr. Hargreaves' private notes.

The datum is defined as 100 feet below an assumed elevation for high water. This is in itself quite indefinite; but in making the plan, Mr. Hargreaves checked his levels back to the Standard bench-mark already described; its elevation being 127.11 feet above the Hudson's Bay datum. This value is marked on the original plan, now in the City Hall; and it serves to fix the datum in elevation.

City datum for Victoria.—This datum was established by Mr. E. A. Wilmot, in laying out a sewerage system for the city in 1890 to 1893. It was originally known as the City Sewer datum; and it was adopted by the city council about 1893, as the City datum for Victoria; Mr. Wilmot being City Engineer from 1892 to 1899. The original Hudson's Bay datum was not adopted in place of this is not clear; it differs only a few inches from it. Possibly Mr. Hargreaves' notes were lost before this date. His contoured plan has since been extended with reference to the City datum; and in the list of bench-marks at the City Hall, the entries are not infrequently for the old datum, especially in some districts; so that much caution is required in making use of the elevations given.

This datum, like the Hudson's Bay datum, is based on an assumed elevation of 100.00 feet for high water; but the levels assumed for high water were determined independently and do not correspond. How the high water level was obtained in this case, we will have occasion to explain later on. The datum itself is fixed, however, with reference to the Standard bench-mark, at the corner of Wharf and Fort streets, for which the elevation above this datum is 126.76. This figure is taken from Wilmot's original level notes; and it is so entered also in the list of City bench-marks.

There are a few City bench-marks for which elevations are still to be given with reference to the Hudson's Bay datum. The most trustworthy values for the difference between these two datum planes are given by this bench-mark and the one on the City Hall. This latter is on the side entrance to the City Hall on Pandora street; a broad arrow cut on the surface of the lower stone step near its east end, the step being slightly above the level of the sidewalk. Its elevation above the Hudson's Bay datum is marked on the contoured plan of Victoria. The relative elevations are as follows:—

	Standard Bench-mark.	City Hall Bench-mark.
Above Hudson's Bay datum.	127.11	153.65
Above City datum.	126.76	153.35

SESSIONAL PAPER No. 21c

The difference of 0.35 foot is considered by the Engineering staff at the City Hall to be the most accurate that can be arrived at; and this value is the same as the difference given by our Standard bench-mark.

Public Works datum.—This is a Low-water datum established by Mr. F. C. Gamble while Resident Engineer of Public Works, and used as the plane of reference for soundings in the harbour, and also for the tidal observations of 1893 to 1897. This is a most important datum, as it has become the basis of the chart of the harbour, and has afforded indirectly the starting point for the City levels. It was thought to be most definitely fixed, with reference to a series of bench-marks around the harbour; but unfortunately all record of the elevation of these was lost by the destruction of the Public Works documents by the fire at New Westminster in September 1896. The most persevering efforts have been made to re-establish this datum, especially by those interested in the chart depths, the grounding of vessels, and dredging operations; but these efforts have been without definite result until a clue was obtained this season.

The Public Works datum was originally the zero of a standard tide scale of Mr. Gamble to coincide with 2 feet 8 inches on a tide gauge on the Hudson's Bay Co's wharf; this being said to be the lowest level of low water which had been noted. The zero on this standard scale was taken to represent low water mark at spring tides; and 9 feet on the scale, to represent high water at spring tides. When the continuous tidal observations were begun, the limiting values afterwards recorded were as follows: Extreme high water, 10 feet 9 inches; extreme low water, at 8.30 a.m. July 8, 1894, 18 inches below the zero of the scale; making the extreme range 12 feet 3 inches. The scale thus proved to be well set in its height; as the levels of ordinary high and low water fall symmetrically between these extreme limits. The facts as here stated, are taken from a report of Mr. Gamble's to his department, dated August, 1894. The tidal observations were continued until May, 1897, when the Public Works office was removed to New Westminster.

The only connection by which the Public Works datum can now be determined, is due to Mr. E. A. Wilmot. It was made incidentally, when he was establishing the City Sewer datum for Victoria in January, 1891. He accepted the level of 9 feet on the Public Works standard tide scale, as high water at ordinary spring tides; and he took this as elevation 100.00 feet for the City Sewer datum. His levels make direct connection from the tide scale, which was on the Old Custom House wharf, to the bench-mark at the corner of Wharf and Fort streets; but the connection depends ultimately on a single reading on the water surface. The resulting elevation of this bench-mark above the zero of the Public Works tide scale, is 35.76; and conversely, the elevation of its zero above the City datum is 31.00. The above explanations and figures are taken from Mr. Wilmot's original level notes; as the present Engineering staff at the City Hall were unaware of the relation of their datum to tide levels, or the way in which the datum was originally established.

The value of this connection can scarcely be overestimated; as it fixes the long lost Public Works datum, and the Low-water tidal datum, with reference to every reliable City bench-mark in Victoria. The importance of this will be better appreciated when the Chart datum is next considered. This connection has also made the City datum the most desirable one to use, for the comparison of the relative elevations of all the other planes of reference.

Chart datum.—The Admiralty chart of Victoria harbour is made from two sources; the outer harbour, outside the line joining Work point and Shoal point, is from a survey made in 1895 by Lieutenant B. M. Chambers, R.N. This is stated on the chart issued in March, 1896; but there is no reference on that chart to the information on which the inner harbour is based, nor is there mention of any plane of reference for the soundings.

It is now clear that the inner harbour is taken from the surveys of the Public Works department. Such plans in that department as have survived the fire, are

partial and fragmentary; but a complete plan of the harbour was known to have been made before 1895 by Mr. P. Summerfield, who was employed by Mr. Gamble to do so. A copy of this plan was eventually found in a surveyor's office in Victoria. It is without title or date, but was identified by Mr. C. Worsfold, assistant engineer in the Public Works department, as undoubtedly a copy of Mr. Summerfield's plan; and accordingly it is to the Public Works datum that the complete soundings given upon it are referred. It is also to be noted that this plan existed when the chart, issued in 1896, was compiled. A comparison with the Admiralty chart, made by Mr. Worsfold and myself, with care to avoid places where dredging has since been done, shows that the soundings are identical. The plane of reference for the soundings in the inner harbour, as given on the Admiralty chart, is thus proved to be the Public Works datum; for which the elevation is now known through Mr. Wilmot's levels, as already explained.

Tidal Survey datum.—This is the Low-water datum established for the recent tidal observations at Victoria. When these observations were begun in 1900, by Mr. F. N. Denison of the Meteorological service, the Public Works tide scale no longer existed, and all their records were already lost in the fire of 1898. On consultation with Mr. Gamble and Mr. Worsfold, a plane of reference was adopted, to correspond as nearly as might be with the former Public Works datum. The new datum plane was fixed by reference to a new bench-mark, and also connected with the Standard bench-mark on Wharf street; the elevations being given below. A complete year of the new tidal observations is included in the basis of the tide tables, the record being obtained in 1903 to 1904, by Mr. E. Baynes Reed, Superintendent of the Meteorological office, and Mr. Denison.

Much trouble has been taken to ascertain the relation of this datum to the chart soundings. With this object, special soundings were taken in the harbour by Captain Walbran of the Marine department, for comparison with the tidal record. Simultaneous observations of the water level at Victoria and at Esquimalt were also made, in the hope of obtaining a connection there. But the results need not be detailed, as these methods are necessarily uncertain, and the relation has now been ascertained from instrumental levels.

This datum is in use for the dredging operations now in progress; and for the check soundings taken by Captain M. Newcomb, who is in charge. The depths as dredged are thus brought into correspondence with the zero level of the tide tables. This datum is also cited by Mr. Thos. C. Sorby, on the plan of Victoria harbour which he has compiled and published in 1904. The following bench-marks serve to fix this datum:—

Tidal Survey bench-mark.—At the rear of the Old Custom House building on Wharf street at the foot of Broughton street. The top of a brass bolt drilled vertically into the granite rock, at 16 feet from the north-west corner of the building, with the letters 'B. M.' cut beside it on the sloping surface of the rock. Elevation above the Tidal Survey datum, or zero of the present tide scale, 15.40 feet.

Standard bench-mark.—On the building at the north-east corner of Wharf and Fort streets, now occupied by the Hamilton Powder Co's offices. The top of the sandstone foundation below the brickwork, at the street corner, nearly on a level with the sidewalk. Elevation above the Tidal Survey datum, 36.36 feet. The surface of the same course of sandstone forms the door sills along the Wharf street front of the building. The southern end of the door sill next the corner, is used as a City bench-mark. Its level is identical with the point above described.

This datum is thus 9.60 feet below the level for high water, which was taken as 9 feet on the standard tide scale placed by the Public Works department; and which was made 100.00 feet in establishing the City datum. The Tidal Survey datum is thus at elevation 90.40 feet above the City datum.

SESSIONAL PAPER No. 21c

Royal Engineers' datum at Victoria.—This datum is defined as Mean Sea level. Its relation to the City datum has been obtained from seven of the bench-marks established in Victoria by the Royal Engineers, for which elevations were determined by Mr. Wilmot in his sewerage levels. The seven differences are as follows:—3.88, 3.86, 3.77, 3.70, 3.74, 3.76, and 3.75 feet. The resulting mean value is 3.78 feet below elevation 100.00; which places the Royal Engineers' datum at 96.22 feet above the City datum. The reason for the considerable variation in the difference is not evident. Mr. Wilmot's levels are always carefully checked, no total closing error of more than 0.08 being found in his notes; and the residual error would be half of this. It is equally difficult to admit the error to be actual, in bench-marks established by the Royal Engineers. In any case, the resulting mean value must be very close to the truth.

The question of the true elevation of Mean Sea level, we will discuss later, in the light of other determinations.

DATUM PLANES AT ESQUIMALT.

Some valuable planes of reference exist at Esquimalt, more especially the Low-water datum for the tidal observations which the Public Works department are taking there. As the harbours of Victoria and Esquimalt both open on the Strait of Fuca at a distance of only three miles from each other, the tide levels at both places must coincide closely. The only reason apparent for any want of correspondence in the data, is their determination in different years. To correlate the Esquimalt data with Victoria, the Tidal Survey in the spring of 1905 arranged with Mr. G. Hargreaves to connect the bench-marks at Victoria by instrumental levels with the Esquimalt dry dock. These levels were run both ways, and checked.

At the dry dock, there are two scales of feet cut on the masonry, one inside and the other outside the dock gate. These consist of Roman numerals, six inches high; the lower edges of the numerals being the even feet. The lowest figure is V, where the arc of the invert meets the side of the dock. The zero of both scales is at the level of the invert forming the dock sill. To verify this, check measurements have been taken which indicate that there cannot be more than a quarter of an inch of discrepancy between the scale and the invert. Strictly speaking, the level herein termed the Dock sill, is the elevation of the zero of the inside scale, taken from the figures as actually cut.

The elevation of the dock sill, referred to the City datum at Victoria, is 71.45 feet; as found by the instrumental levels of this season which connect Esquimalt with Victoria, and which have for their point of reference the Standard bench-mark on Wharf street, at elevation 126.76. These levels were run both ways over the distance of $3\frac{1}{2}$ miles, with a closing error of 0.04 foot; the mean of the two results being accepted.

Dry Dock datum.—Used in the construction of the dry dock, from 1883 to 1886. The datum is defined by an assumed elevation of 50.00 feet for ordinary high water at Esquimalt. It is also stated in the Engineer's levels, that this elevation for high water is the same as 26 feet 6 inches above the sill of the dock; but this may be only approximate, as the dry dock was not completed when the datum was established.

This datum would be of little interest in itself, and might not now deserve to be re-established, were it not that Mean Sea level, which forms the starting point of the Royal Engineers' levels, is determined with reference to it. The bench-mark by which it was originally fixed, was a ring bolt on the Admiralty pier; but this has been built over, and is now lost. This ring bolt was also the initial bench-mark in the Royal Engineers' survey. Fortunately a record of its elevation with reference to both datum planes exists in the level notes. The relation between the two is thus

accurately known; the resulting difference being 47.665; and accordingly this is the elevation of the Royal Engineers' datum above the Dock datum.

The data above cited were given by Lieut. G. C. E. Elliott, R.E., in January 1902, before the Royal Engineers left the country, in reply to inquiries from Baynes Reed. Lieut. Elliott recognizes the difficulty, however, of re-determining the original Dock datum.

Royal Engineers' Datum.—Used in the surveys made by Lieut. Lang in 1895 and 1889. The datum is defined as Mean Sea level, which was determined with reference to the Dock datum, as above explained; and fixed with reference to the lost bench-mark.

To correlate this datum with the other elevations, instrumental levels were run by myself this season to the dry dock, from the nearest bench-mark on the Esquimalt road. These levels were run both ways with a closing error of 0.02 foot, which was averaged out. The bench-mark is on the retaining wall built on the south side of the Esquimalt road, opposite Signal hill; a broad arrow cut on the side of the wall facing the road, at 46 feet from its eastern end. Elevation of this bench-mark, stated by Lieut. Elliott, 37.24 feet above the Royal Engineers' datum.

We are thus able to give two values for the Royal Engineers' datum with reference to the dock sill:—

By new levels; bench-mark above dock sill.	61.51
Elevation of bench-mark on R. E. datum.	37.24
	<hr/>
R. E. datum above dock sill.	24.27
	<hr/>
Assumed level of high water above dock sill, taken as elevation 50.00 on Dock datum.	26.50
R. E. datum below assumed high water, or 50.00 less 47.665.	2.33
	<hr/>
R. E. datum above dock sill.	24.17

The value derived from the bench-mark is preferable; and by its adoption, an elevation of 50.00 on the Dock datum, is found to be actually 26.60 feet above the dock sill, instead of 26 feet 6 inches as supposed; but this discrepancy is not unlikely in the circumstances already explained.

As a final result we find the elevation of the Royal Engineers' datum at Esquimalt, to be 95.72 feet above the Victoria City datum. The difference between this value and the elevation of their datum in Victoria itself, we will refer to later on.

Public Works datum.—This is a Low-water datum, used as the zero level for tidal observations taken at Esquimalt since 1897, and still continued there. It was determined by Mr. G. A. Keefer, the present Resident Engineer of Public Works, taking the mean level of the lowest low water recorded in each month, throughout the year. It is fixed with reference to the sill of the dry dock, at 19 feet 6 inches above it, on the inside masonry scale. The elevation of this datum is accordingly 96.60 feet above the City datum at Victoria.

The usual method by which the Admiralty determine their datum where there is a pronounced inequality in the tide, is to take the mean level of the lower low water at each spring tide, or every fortnight, throughout the year. The method adopted by Mr. Keefer should therefore give a plane of reference which is lower than the Admiralty standard, by the semi-monthly inequality in the height of low water. The difference given by these two methods is 0.44 of a foot, as found from two years' continuous tidal record from 1895 to 1897 at Victoria.

SESSIONAL PAPER No. 21c

Summary of Tide Levels at Victoria and Esquimalt.	Above Victoria City datum.
	Feet.
Bench Mark, corner of Wharf and Fort streets ; as already described... ..	126.76
Tidal Survey Bench Mark; a brass bolt in the rock in rear of the Old Custom House building, foot of Broughton street... ..	105.80
Extreme High Water, during three years observation, from 1895 to 1897 and 1903 to 1904. Occurred 1896, January 26... ..	102.20
High Water at Spring tides. Average level of the two highest high waters in each month, during two complete years from 1895 to 1897.....	100.19
Ordinary High Water; taken as 9 feet on Public Works scale, and adopted as elevation 100.00 in establishing the City datum... ..	100.00
Mean Sea level. From hourly ordinates during two complete years, from April 1895 to April 1897. Above zero of the tide scale or Public Works datum in the two years, 5.728 and 5.776 feet. Mean elevation resulting	96.75
Mean Sea level. From hourly ordinates during one complete year, from March 1903 to March 1904. Above Tidal Survey datum 6.143 feet. Elevation... ..	96.54
Harmonic Tide Plane, as determined in 1895 to 1897. At a distance below Mean Sea level given by the sum of harmonic constants $M_2+S_2+K_1+O_1$..	91.89
Low Water at Spring tides. Average level of the two lowest low waters in each month, during two complete years, from 1895 to 1897... ..	91.15
Average level of the lowest low water in each month during the two years, 1895 to 1897... ..	90.71
Public Works datum; the zero of their tide scale at Victoria in 1893 to 1897... ..	91.00
Datum of the Public Works tidal observations at Esquimalt; 19 feet 6 inches above masonry sill of Dry Dock... ..	90.95
Tidal Survey datum; the zero for the heights in the Tide Tables... ..	90.40
Extreme Low Water, during three years observations, from 1895 to 1897 and 1903 to 1904. Occurred 1896, June 24... ..	89.45
Sill of masonry Dry Dock at Esquimalt... ..	71.45

Mean Sea level determinations.—Some explanation of these is required, especially as there is an apparent want of correspondence between the Royal Engineers' datum and Mean Sea level. The various determinations are now correlated by the instrumental levelling referred to; and this also enables the results of the harmonic analyses of the records from registering tide gauges, to be compared on the same basis. In this analysis, Mean Sea level is the average value found from the summation of the 8760 hourly tidal ordinates throughout the year; and on this principle, the most accurate result possible is obtained. The determinations, reduced to the City datum in Victoria, are as follows:—

- At Victoria. Tidal observations by Public Works department; two complete years from April 1895 to April 1897. Mean Sea level above Public Works datum, from hourly ordinates in each year; 5.728 and 5.776 feet. Average elevation resulting... .. 96.75
- At Victoria. Tidal Survey observations; one complete year from March 1903 to March 1904. Mean Sea level above Tidal Survey datum, from hourly ordinates, 6.143 feet. Elevation resulting: 96.54

At Victoria. Royal Engineers' datum, at 3.78 feet below 100.00 on the City datum.	96.22
At Esquimalt. Royal Engineers' datum, in surveys of 1885 to 1889; 37.94 feet below bench-mark on Esquimalt road.	95.72

At first sight, it might be considered a better method of procedure to assume Mean Sea level to have the same absolute elevation in every case, and to take the coincident value as a basis of comparison for the various datum planes. But this assumption when carried out, is found to imply a two-fold error in the levels of the different engineers; namely, a minus error of 0.50 foot in Mr. Hargreaves' and the same time a plus error of 0.53 foot in Mr. Wilmot's. These errors do not attribute to any assumed values for high water, or such like, but to actual instrumental work and they are therefore quite inadmissible.

Some small part of the difference may be due to actual or physical variation in the annual value of Mean Sea level. This variation appears to be greater in the Pacific than in the Atlantic. The values already given show a difference at Victoria of 0.21 of a foot between the years 1896 and 1903. Determinations have also been made during a series of years by the United States Coast Survey in California and Puget sound, as well as during five years in the Strait of Georgia by this Survey. The greatest variation in level between any two years in the period of the observations is 0.30 to 0.34 of a foot in these localities. The variation may thus be considered as considerable when special years are selected; but even then, it is much less than the large difference we have here to account for.

It thus becomes evident that the true explanation of so large a difference is to be found in the type of the tide, or the form of the tide curve at Victoria and Esquimalt, to which we have already alluded. Towards high water the tide curve is very flat, and the long stand of the half-tides is at a high level; while the low water falls sharply and is of short duration. With such a tide, if Mean Sea level is taken as the half height or mid-range, it is plain that this may be very different from the mean level derived from its height at every hour throughout the year. The latter method undoubtedly gives the true mean level of the sea; as this integration of the tide curve furnishes the height of the horizontal line which bisects its area. This shows also the superior character of the tidal record obtained from a self-registering tide gauge.

The amount by which the values for mean sea level differ, when obtained by the two methods indicated, we can illustrate from the tidal observations at Victoria. The result is entirely independent of instrumental levelling and also of any absolute elevation; so it can be referred to an individual tide scale. The comparative results are as follows:—

	Scale reading.	Reduced elevation.
From Public Works observations at Victoria; in 1895 to 1897.		
High Water spring tides. Average level of the two highest tides in each month during two years; April 1895 to April 1897.	9.19	100.19
Low Water spring tides. Average level of the two lowest tides in each month; during the same period.	0.15	91.15
Half height, or mid-range.	<u>4.67</u>	<u>95.67</u>
Mean Sea level from hourly ordinates during the same two years, 1895 to 1897; above zero of scale.	<u>5.75</u>	<u>96.75</u>

It thus appears that the level obtained for the half height of the tide may be a foot lower than when derived from hourly ordinates. The relatively low elevation of the Royal Engineers' datum, if determined in this way, would thus be fully accounted for; as the elevation which we find by this method is lower than their datum at either

SESSIONAL PAPER No. 21c

Victoria or Esquimalt. The difference of half a foot in the elevation of their datum at the two places, we have no means of explaining; unless possibly these determinations were independently made.

Where the tide is of so unusual a type, it is the more important that the standard method of determining Mean Sea level should be clearly understood; because it is only with reference to this level that any variation in the land elevation can be detected. The evidence on this question points to a rise of the land; and some approximation to the rate of rise per century, it would evidently be valuable to ascertain. A basis for this is now established by the reliable values obtained for Mean Sea level, with reference to bench-marks.

DATUM PLANES AT VANCOUVER.

The datum planes at Vancouver are all in harmony with each other; and when they do not coincide, the difference between them is known. This fortunate result is due to Mr. H. J. Cambie, the first Resident Engineer of the Canadian Pacific Railway since its completion. The various datum planes are all referred to the same bench-mark on the C.P.R. station building.

C.P.R. bench-mark.—On the north front of the Vancouver Station building, near its east end; on the granite sill of the most easterly door opening on the train platform. A broad arrow cut on the surface of the sill at its east end and marked 'B.M.' on the plinth above. Elevation above the C.P.R. datum, 108.35 feet.

Canadian Pacific Railway datum.—Defined as 100.00 feet below ordinary high water; and fixed with reference to the above bench-mark.

Vancouver City datum.—On this datum, elevation 100.00 is supposed to be extreme high water; but the level adopted is higher than the highest tide ever recorded. The datum is fixed with reference to the bench-mark already described; its elevation above the City datum being 107.10 feet. The City datum is thus 1.25 feet above the C.P.R. datum.

Chart datum.—The low water datum for the reduction of the soundings was established by Mr. W. J. Stewart, of the Marine department, when making the survey of Vancouver harbour in 1891. It was originally fixed with reference to a broad arrow cut on one of the iron piles supporting the C.P.R. wharf. The datum was afterwards referred to the bench-mark on the station building; it being stated in a note on the present chart of the harbour that the soundings are reduced to a level of 23 feet 7 inches below that bench-mark.

Tide Levels at Vancouver.

	Above C. P. R. datum.
Bench Mark on C. P. Railway Station building, as already described.	Feet. 108.35
Surface of railway wharves. Approximate mean level.	106.00
Extreme High Water of December 1887, which reached the grate bars of the Hastings saw mill during a heavy gale.	100.70
High Water level, adopted as elevation 100.00 in establishing the C. P. R. datum.	100.00
Highest High Water recorded by the tidal gauge during six months in June to December 1901, and during the year from March 1902 to March 1903. Occurred 1901, December 26.	99.75
Chart datum, to which the soundings in Vancouver harbour are reduced. At 23 feet 7 inches below the C. P. R. bench-mark.	84.77
Lowest Low Water recorded by the tidal gauge during the eighteen months already indicated. Occurred 1901, December 27.	83.75
Zero of the tide scale, in the observations of 1901 to 1903.	82.30

VII., A. 1906

3.22

7.72

to assume
to take the
But this
levels of two
ives' and at
to not attach
mental work;

variation in
water in the
at Victoria
ve also been
ifornia and
his Survey.
the observa-
be consider-
an the large

ference is to
and Esqui-
urve is very
water falls
is taken as
nt from the
The latter
ation of the
area. This
f-registering

ained by the
at Victoria.
any absolute
ative results

Reduced
elevation.

100.19

91.15

95.67

96.75

de may be a
elevation of
ly account.
am at either

BENCH MARKS AND LEVELS AT OTHER TIDAL STATIONS.

Tidal stations equipped with registering gauges have been established recently as a basis for the whole coast of British Columbia. At those of the greatest strategic importance, bench-marks have been put in, and the instrumental levelling done personally by the writer. The tidal record secured will soon enable the more important tide levels to be deduced from the observations. The tide scales used, are of enamelled iron; which are very durable and readily cleaned.

Port Simpson, B.C.—The bench-mark to which the tide levels are referred is a brass bolt with a round head, drilled into the rock, in the rocky foreshore which extends northward from the Hotel Northern. This rocky part of the foreshore is dry at half tide. The bolt is to the west of the wharf, at 174 feet from the angle between the side of the wharf and the hotel platform.

The elevation of 100.00 feet was assumed for the reference point first used, which was cut on the rock in another position. In the summer of 1905 the first bench-mark was put in, and the levels completed.

The tide levels are from the registering gauge which has been in operation since November 1902.

Tide levels at Port Simpson.	Feet.
Cap of wharf, beside the tide gauge..	109.10
Extreme High Water, during seven months, from December 1902 to June 1903 inclusive. Occurred 1902, December 16..	104.90
High Water at Spring tides. Average level of the highest High Water at each spring tide during the above period..	103.26
Bench Mark. Top of brass bolt as described..	98.91
Mean Sea level. Deduced from the hourly ordinates of the tide during one complete year, from February 1904 to February 1905; above zero of tide scale, 12.533 feet. Elevation resulting..	93.47
Low Water at Spring tides. Average level of the lowest Low Water at each spring tide during the above period...	83.28
Extreme Low Water during the above period. Occurred 1902, December 15.	81.50
Zero of the tide scale, from the beginning..	80.89

The period of tidal observations above indicated, includes the seasons at which the tides usually have their extreme range in the course of the year. The extreme levels as given, are in all probability the limiting values for the year.

Wadhams, Rivers inlet, B.C.—The bench-mark is a broad arrow cut on the rock at the south side of the bay in which Wadhams' cannery is situated. It is 55 feet from the point at which the rock begins, which rises to the southward into cliffs. Its level is reached by unusually high tides.

SESSIONAL PAPER No. 21c

A registering gauge was placed here, and observations begun in July 1905.

Tide levels at Wadhams.	Feet.
Surface of Wharf, beside the tide gauge..	103.21
Extreme High Water. Elevation which the highest tides are said to reach.	101.60
Bench Mark on the rock, as described..	100.00
Extreme Low Water. It is probable that the tide never falls below elevation..	83.80
Zero of the tide scale	81.59

Hardy bay, Vancouver island.—This bay is situated in Queen Charlotte sound. The bench-mark is a copper bolt, 1½ inches diameter, drilled into the rock on the north side of the Government wharf. It is 58 feet from the first pile bent of the wharf at the shore end, and 8 feet from the side of the wharf. It is about two feet below extreme high water. The elevation assumed for the top of this bolt is 100.00 feet; and the zero of the tide scale is at elevation 78.37.

A registering tide gauge was placed here, and observations begun in July 1905.

Banfield, Barclay sound.—This is the Pacific Cable station, at four miles from Cape Beale, on the west coast of Vancouver island. Tidal observations were secured here, from February 1903 to June 1904, with the exception of one month.

The tide scale used, was attached to the wharf which is immediately below the cable offices; and in August, 1905 the elevation of the zero of the scale was fixed with reference to a bench-mark, consisting of a brass bolt drilled into the rock at 20 feet from the south-east corner of the wharf; about the level of high water.

Tide levels at Banfield.	Feet.
Bench Mark. Top of brass bolt, as described..	100.00
Low-water datum to which the tidal observations are reduced; at one foot on the tide scale..	89.40
Zero of the tide scale, during the period of the observations; allowing one inch for settlement of wharf since then..	88.40
Zero of the tide scale, as found in August, 1905..	88.33

Clayoquot, Vancouver island.—The registering tide gauge, placed here in August, 1905, is at a small wharf, extended to deep water for the purpose, situated near the telegraph office at the so-called Town site on Low peninsula opposite Stubbs island, in the mouth of the sound.

The bench-mark is a brass bolt drilled into diorite rock, at 23½ feet from the shore end of the wharf, on its east side. It is about the level of high water.

The elevation assumed for the top of this bolt is 100.00 feet, and the zero of the tide scale is at elevation 85.01. The surface of the planking of the wharf is approximately at elevation 107.00.

DATUM ON THE FRASER RIVER.

The Department of Public Works have had three registering gauges on the portion of the Fraser river since 1895. These are situated at New Westminster, Garry point at the mouth of the river, and at Sand Heads on the edge of the river shoal which has formed off the mouth of the river, in the Strait of Georgia.

The zero level for the tidal observations at Sand Heads was established by F. C. Gamble as the average of the lower low waters. The record since 1895 shows that extreme low water falls some ten inches, or a foot, below it.

The same low water datum is used for the other tide stations at Garry and New Westminster. Its level has recently been carried to the new Post Office building by the present Resident Engineer of Public Works, Mr. G. A. Keefer. He has cut a bench-mark on this building to record it permanently. It is on the cap on the left side of the steps at the entrance of the Post Office on Columbia Street. The elevations with reference to this datum are as follows:—

Tide levels on the Fraser River.	Feet
Bench Mark on the Post Office building, New Westminster..	52.0
Mean Sea level.—Deduced from the hourly ordinates of the tide during five years of observation as follows:—	
During one year, May 1, 1895 to May 31, 1896..	8.458
" " " October 1, 1896 to October 29, 1897..	8.416
" " " November 1, 1898 to November 15, 1899..	8.474
" " " November 15, 1899 to November 24, 1900..	8.561
" " " January 16, 1901 to January 27, 1902..	8.425
Mean value for the five years..	8.487
Low-water datum. The average of the lower low waters, used as the zero level of the tide gauges..	0.0

ADMIRALTY BENCH-MARKS.

The Admiralty surveying steamer H. M. S. *Egeria*, has been engaged in hydrographic surveys for some years in British Columbia waters; and its various commanders have established bench-marks or other reference points to fix the low water datum to which the chart soundings are reduced.

Some of these are points of natural rock at about half tide level, which answer to define a low-water datum for soundings that are only taken to the low water mark; but a rock within the range of the tide, overgrown with seaweed and barnacles in these prolific waters, is scarcely suitable as a bench-mark for definite tide levels.

We give first a full description of these reference marks in the more important localities, or where a continuous tidal record of sufficient length has been secured to furnish a basis for satisfactory tide levels. The record must evidently be continued day and night, to be of use, when diurnal inequality is the leading feature of the tide. Some of the descriptions which are given, are from personal inspection.

Comox.—Chart name, Port Augusta. The chart survey was made by Commander M. H. Smyth, R.N., in 1898, and the bench-mark at Comox serves to define the datum for the whole extent of Baynes sound. It is of the more importance as tidal observations were secured at Union wharf in this sound, for fifteen months in all, during the course of the years 1898 to 1900. By means of comparative observations made

SESSIONAL PAPER No. 21c

the time, the datum has also been carried northward to Mitlenatch island, and to Quathiaaki cove near Seymour Narrows.

The observations at Union wharf were taken with a registering tide gauge, and the record has been handed over to this Survey through the courtesy of the Admiralty. The tide levels thus secured will serve for the mining town of Union when the results are worked out.

The note on the general chart of Baynes sound is as follows:—'The soundings are reduced to 23.9 feet below the level of the slab at Goose Spit Magnetic Observation Spot.' This spot is marked by a triangle on the charts of Baynes sound and Comox, Nos. 333 and 3127. We can give a description of this bench-mark from personal inspection, which will enable it to be found and identified.

The Magnetic Observation spot is on the north-west shore of Goose spit, in the second small bay west of the Admiralty building and wharf. It is between the last two ridge butts towards the south-west end of the spit, and ten feet back from the edge of a low bank running along the beach. It consists of a cement slab, about 16 inches square, set level with the surface of the sandy ground. It is marked '*Mag. Obv. Egeria, 1898*,' in letters of lead let into the slab. Its level is about ten feet above high water mark.

There is another Observation spot, for latitude and longitude, which is farther to the south-west and farther back from the shore. It is a similar slab of cement; but it is a few inches above the ground, and differently marked, and cannot be mistaken for this one.

Nanaimo.—The chart survey was made by Commander Smyth, R.N., in 1899. The note regarding datum on the chart of Nanaimo harbour, No. 573, is as follows:—'The datum to which the soundings are reduced is 18.6 feet below the summit of the masonry beacon on Beacon rock, which corresponds to ten feet below a mark (10) cut in the perpendicular rock surface close to the small landing stage on the north side of the peninsula fronting the town, and adjoining the Ballast wharf.' This mark was used for reference in the dredging operations in the harbour, carried out by the government.

The beacon referred to, is a truncated cone of concrete and iron, and its surface is rough and somewhat rounded. The mark on the rock should give a more definite elevation; but after careful search it could not be found, owing to the vagueness of the description. The mark is within the range of the tide, and the rocks are grown over with barnacles, which were cleaned off in several places in the endeavour to find the mark.

Tidal observations were taken here, day and night for seven weeks, from March 25 to May 12, in 1899.

Telegraph harbour.—This harbour is on Kuper island, on the same body of water as the new towns of Ladysmith and Chemainus; the three places being within seven miles and within sight of each other from the water. This harbour serves as a port of reference for a number of other places amongst the Gulf islands in the Strait of Georgia. Continuous tidal observations were secured here by Captain J. F. Parry, R.N., in 1904, from April 11 to Nov. 28; a duplicate being kindly supplied to this Survey. The observations were to be continued in the season of 1905.

The low-water datum at this harbour is referred to a bench-mark and also to a natural rock. The bench-mark is a broad arrow cut in the north-east face of the bare rocky islet situated between Hudson island, and Foster point on Thetis island. It is 35 feet from the summit of the islet, which is two feet above high water. The datum is 12 feet 10 inches below the broad arrow. It is also 7 feet 2 inches below the highest part of the westernmost of the drying rocks lying just outside the low-water line, off the Indian Industrial school. See Chart No. 714.

The additional reference points for datum at Ladysmith and Chemainus, which are on the same body of water as Telegraph harbour, are given below with the other localities.

LOW-WATER DATUM OF THE CHARTS, AT OTHER LOCALITIES.

The following is a list of the bench-marks and other reference points which define the Low-water datum to which the soundings have been reduced in the Admiralty surveys from 1898, till their conclusion in 1905. The list has been compiled by Captain J. F. Parry, R.N., of H. M. Surveying steamer *Egeria*.

The localities are all situated on the waters between Vancouver island and the Mainland, and extend from Queen Charlotte sound to the Strait of Georgia. They are given in their geographical order from north-west to south-east; and towns already given in fuller detail are omitted from this list.

Where the tides have been observed, the character and period of the observations are noted, to indicate the basis available for tide levels, which we have under consideration.

The datum in all cases, is Low Water at ordinary Spring tides; which is usually determined independently in each locality or at most for the extent of some one chart. It cannot therefore be assumed that the datum is at the same actual elevation throughout a region of any great extent. This requires to be specially noted; as the variation in range at the spring and neap tides is quite evident in Queen Charlotte sound, while in the Strait of Georgia the distinction between them is almost effaced by the stronger features of the tide, which have been explained.

The reference points for the level of the datum are either bench-marks or tide rocks. The bench-mark usually consists of a broad arrow cut in the rock; and the reference measurement, which fixes the datum, is taken from the cross line at its point.

Southgate harbour.—In North channel, mouth of Queen Charlotte sound. Low-water datum at 18 feet below the summit of Tide rock at the southern entrance of the anchorage. See Chart No. 3462.

Simultaneous tidal comparisons with Blunden harbour in 1903, show that the time and range of the tide at the two places are identical; and the datum is the same as determined in Blunden harbour. (See below.)

Bull harbour.—In Hope island, mouth of Goletas channel. Low-water datum at 10 feet below the top of the large boulder off the south-east corner of Indian island. See Chart No. 3443.

Shushartie bay.—South side of Goletas channel. Low-water datum at 10 feet 5 inches below the top of Dillon rock. See Chart No. 3430.

Blunden harbour.—Queen Charlotte sound. Low-water datum at 20 feet 8 inches below a broad arrow cut in the rock at the southern extreme of Byrnes island, just above high water. This also corresponds with 5 feet below the top of Moore rock, at the west side of the Bonwick islands. See Chart No. 3448.

Tidal observations taken on a registering gauge, being thus continuous day and night, from July 14 to October 16 in 1903.

Beaver harbour.—Vancouver island. Low-water datum at 13 feet below the top of Cormorant rock. See Chart No. 2067.

Port McNeil.—Vancouver island. Low-water datum at 10 feet 3 inches below the top of Eel reef. See Chart No. 3417.

Alert bay.—In Cormorant island, Broughton strait. Low-water datum at 17 feet 6 inches below a broad arrow cut in a large boulder beside the roadway, 100 yards west of the saw mill of the Indian Industrial school. See Chart No. 3271.

Tidal observations taken on a registering gauge, being thus continuous day and night, from June 6 to September 19 in 1900.

Farewell harbour.—Formed by a group of islands off Blackfish sound. Low-water datum at 20 feet 4 inches below the top of the big boulder at Boulder point the south-west extreme of Berry island. See Charts Nos. 581 and 3387.

SESSIONAL PAPER No. 21c

Growler cove.—In Cracroft island, Johnstone strait. Low-water datum at 11 feet 8 inches below the top of the outer rock in the southern corner of the cove. See Chart No. 3387.

Port Harvey.—Johnstone strait. Low-water datum at 11 feet 11 inches below a broad arrow cut on the rocks on the main shore abreast of Tido Polo islet. See Chart No. 634.

Blinkinsop bay.—Johnstone strait. Low-water datum at 7 feet 6 inches below the top of a large boulder lying three-quarters of a cable north-east of Point George. See Chart No. 3271.

Tidal observations taken day and night for 19 days in September, 1900.

Vers cove.—In Thurlow island, Johnstone strait. Low-water datum at 11 feet 9 inches below the top of Dorothy rock. See Chart No. 581.

Chatham point.—The dividing point between Johnstone strait and Discovery passage. Low-water datum at 18 feet below a broad arrow cut in the face of the rock on the north side of the small islet lying ½ mile west of Turn island, and close off the south shore of Thurlow island. See Chart No. 3260.

Tidal observations taken day and night, from July 21 to August 30 in 1900.

Menzies bay.—Immediately south of Seymour Narrows, in Discovery passage. Low-water datum at 4 feet 6 inches below the base of the beacon on Defender shoal in the bay. See Chart No. 538.

Tidal observations were taken day and night, in Nympe cove at the mouth of this bay, from June 19 to August 1, 1900.

Gowlland harbour.—In Discovery passage. Low-water datum at 9 feet 3 inches below a broad arrow cut in the rock at the south-east extreme of Gowlland island. See Chart No. 3178.

Quathiaski cove.—Discovery passage. Low-water datum at 10 feet below a broad arrow cut on the side of a boulder at the inner end of the wharf. See Chart No. 3162.

Tidal observations taken day and night from May 8 to June 4 in 1899.

By comparison of the day tides during 16 days in May, with the simultaneous observations taken at Union, the elevation of the general datum for Baynes sound was found to be at 5 feet 8 inches on the Quathiaski tide scale.

This relation being determined, the datum as above defined is presumably the same as in Baynes sound, which is referred to the Comox bench-mark already described.

Mitlenatch island.—Eight miles E. S. E. from Cape Mudge. Tidal observations taken day and night from May 29 to June 6 in 1899, simultaneously with the observations at Union in Baynes sound; for comparison of time and datum. See Chart No. 530.

Baynes sound.—See description already given under Comox, of the bench-mark which defines the datum throughout this sound; and the tidal observations taken at Union.

Nanoose.—Vancouver island. Low-water datum at 11 feet below the top of a small rock lying 175 yards to the westward of the northern and highest of Entrance rocks. See Chart No. 585.

Tidal observations taken day and night from October 22 to November 16, in 1903; and in the day time only, for five weeks in July and August, 1904, for comparison with Telegraph harbour.

Hammond bay.—Vancouver island. Low-water datum at 4 feet 6 inches below the top of Clarke rock. See Chart No. 579.

Tidal observations taken in the day time only, for nearly three weeks in July and August, 1904.

Departure bay.—Three miles north of Nanaimo. Low-water datum at 18 feet 4 inches below the summit of Black rock, in the northern part of the bay. See Chart No. 2512.

Tidal observations taken in the day time only, for about six weeks in July and August, 1904.

Dodd Narrows.—Between Mudge island and Vancouver island. Low-water datum at 20 feet 6 inches below a broad arrow cut on the western face of a large rock lying 75 feet eastward of the inner end of the Government wharf at Percy anchorage on Gabriola island, which is within a mile of the narrows. See Chart No. 3020.

Tidal observations taken at Percy anchorage in the day time only, for nearly six weeks in October and November, 1904. The time of the tide at Dodd Narrows, found to be identical with Percy anchorage, from 27 simultaneous observations carefully taken.

Gabriola pass.—Between Gabriola and Valdes islands. Tidal observations taken in the day time only, for three weeks in August, 1904. The range is the same as at Telegraph harbour. This pass is little used for navigation.

Ladysmith.—Chart name, Oyster harbour. Low-water datum at 4 feet 2 inches below the top of the highest of the Cluster rocks, off the Dunsmuir islands. Chart No. 714.

Tidal observations taken for six weeks, from August to October in 1904. The time and range of the tide found to be absolutely identical with Telegraph harbour in Kuper island, which is on the same body of water.

Chemainus.—On Vancouver island opposite Kuper island. Low-water datum at 18 feet 7 inches below a broad arrow cut in the northern face of the small islet in the bay, lying close off shore, about 600 yards south from the lighthouse. See Chart No. 3029.

Porlier pass.—Between Valdes and Galiano islands. Low-water datum at 12 inches below the top of Black rock. See Chart No. 3029.

Tidal observations taken for a short period in 1905.

Active pass.—Between Galiano and Mayne islands. Bench-mark at the top of Parson rock, in Miners' bay. Low-water datum at 18 feet 1 inch below a broad arrow cut on the southern face of Parson rock, in Miners' bay. This is a conspicuous angular block resting on a ledge rock at the high-water line, about 200 yards north of the English church. A shore road passes immediately behind it, about 20 feet above the level of the beach.

Bench-mark at Georgina point; in the small bay on the south side of the point. Low-water datum at 17 feet 9 inches below a broad arrow cut in the perpendicular face of the rock about 20 yards eastward of the inner end of the boat wharf. See Chart No. 3520.

Tidal observations taken at Georgina point in the day time only, from August to October, in 1904.

Ganges harbour.—In Saltspring island. Low-water datum at 10 feet 3 inches below the top of the highest of the two drying rocks situated in the small bay immediately westward of the rocky point from which the wharf is built out. See Chart No. 3029.

South Pender.—On Pender island. Chart name, Bedwell harbour. Bench-mark at the top of a broad arrow at the northern end of the small bay north of Hay point. Low-water datum at 17 feet 11 inches below this broad arrow which is cut in the face of a rocky cliff, above high-water mark. See Chart No. 2840.

Tidal observations taken here in the season of 1905.

SESSIONAL PAPER No. 21c

Cones rock beacon.—On Moreby island, in Moreby passage. Low-water datum at 16 feet 6 inches below the top of the masonry of the beacon. See Chart No. 2447.

Sidney.—In North Saanich district, Vancouver island. Low-water datum at 9 feet below a broad arrow of sheet copper, on an inside pile of the new Railway wharf; corresponding to a height of 18 feet 10 inches above the sill of the Esquimaux dry dock. See Chart No. 2840.

Low-water
a large rock
by anchorage
o. 3020.
or nearly six
arrows, found
ons carefully

ations taken
e same as at

feet 2 inches
islands. See

n 1904. The
raph harbour

ate datum at
ill islet in the
See Chart No.

um at 11 feet

k at h. n.
ithern face of
esting on the
church. The
of the beach.
e of the point.
perpendicular
arf. See Chart

rom August to

feet 3 inches
small bay imme-
nt. See Chart

Bench-mark.
nt. Low-water
he face of the

